



Quality  
Innovation

# AUTOMATIC FLATBED DIECUTTER

THE LEADING SUPPLIER  
OF INCREASED DIE  
CUTTING PRODUCTIVITY

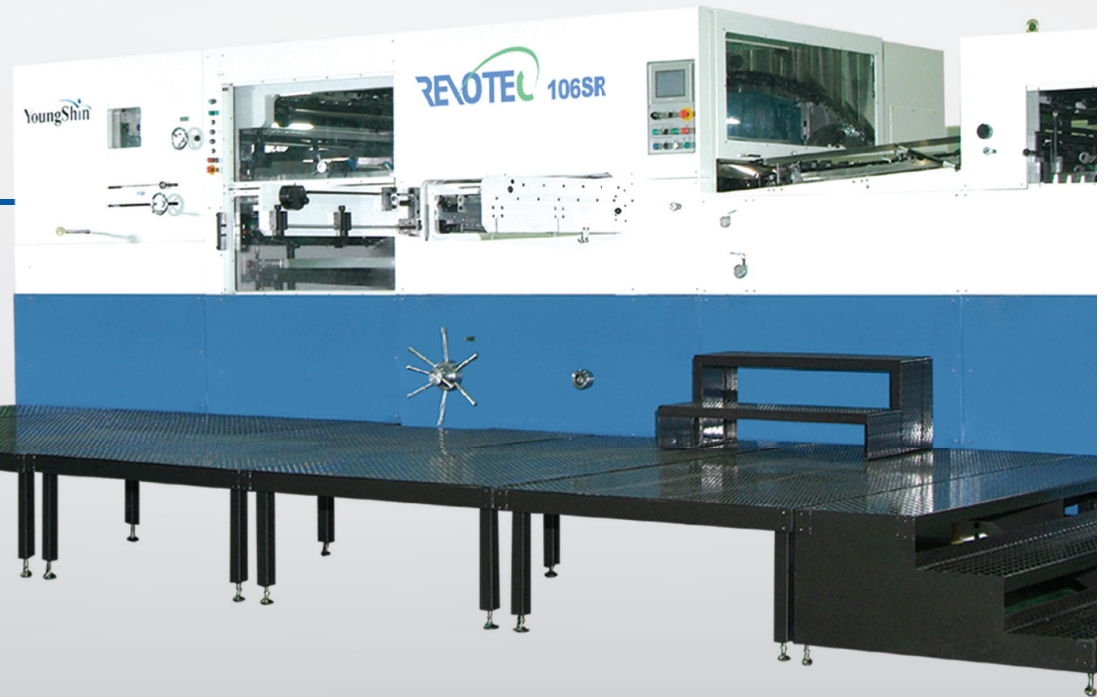


REVOTEC 106SR



#### FEEDER

With the suction device incorporated as part of the mechanical driver, sheets are smoothly fed.



#### FEEDING CONVEYOR

Makes for the seamless feeding of thin sheets and warped sheets.

YoungShin

# AUTOMATIC FLATBED DIECUTTER FOR FOLDING CARTON


## AUTOMATIC FLATBED DIECUTTER

THE LEADING SUPPLIER OF  
INCREASED DIE CUTTING  
PRODUCTIVITY

Specifications of REVOTEC 106SR

### LEAD EDGE REMOVAL DEVICE


Maximum Sheet Size	1060 × 760 mm	41,73" × 29,92"
Minimum Sheet Size	400 × 340 mm	15,74" × 13,38"
Maximum Cutting Size	1060 × 745 mm	41,73" × 29,33"
Inside Chase	1140 × 784 mm	44,88" × 29,68"
Minimum Gripper Margin	8 mm	0,31"
Cutting Pressure	300 tons	330 US tons
Sheet Thickness	Carton Board 0,1 ~ 1,5 mm Corrugated Board (E,B Flute) : 4 mm	Carton Board 0,004" ~ 0,06" Corrugated Board (E,B Flute) : 0,157"
Maximum Speed	7500 s/h	7500 s/h
Required Power Supply	25 Kw	66 AMP
Main Motor	11 Kw	33 AMP
Weight	19 tons	21 US tons
Option	AUTOMATIC APRON : NON-STOP DELIVERY	




**SIDE LAY**  
Side lay with sensor to ensure register by photocell.




**GRIPPER**  
Enhanced durability for the gripper bar and drive.




**CHASE**  
Chase turnover and centerline ensures quick order change. Air floating device for cutting plate.



**TOUCH SCREEN**  
Clear readings ensure quick fault finding and machine operation. Cutting pressure gauge checks cutting pressure and over-cutting pressure.



**STRIPPING SECTION**  
Triple action with lower stripping pins.



**DELIVERY SECTION**  
Automatic counter and tabbing inserter ensures reliability, productivity and batching.