




AUTOMATIC FLATBED DIECUTTER

THE LEADING SUPPLIER
OF INCREASED DIE
CUTTING PRODUCTIVITY


REVOTECH 106SB
STRIPPING AND BLANKING

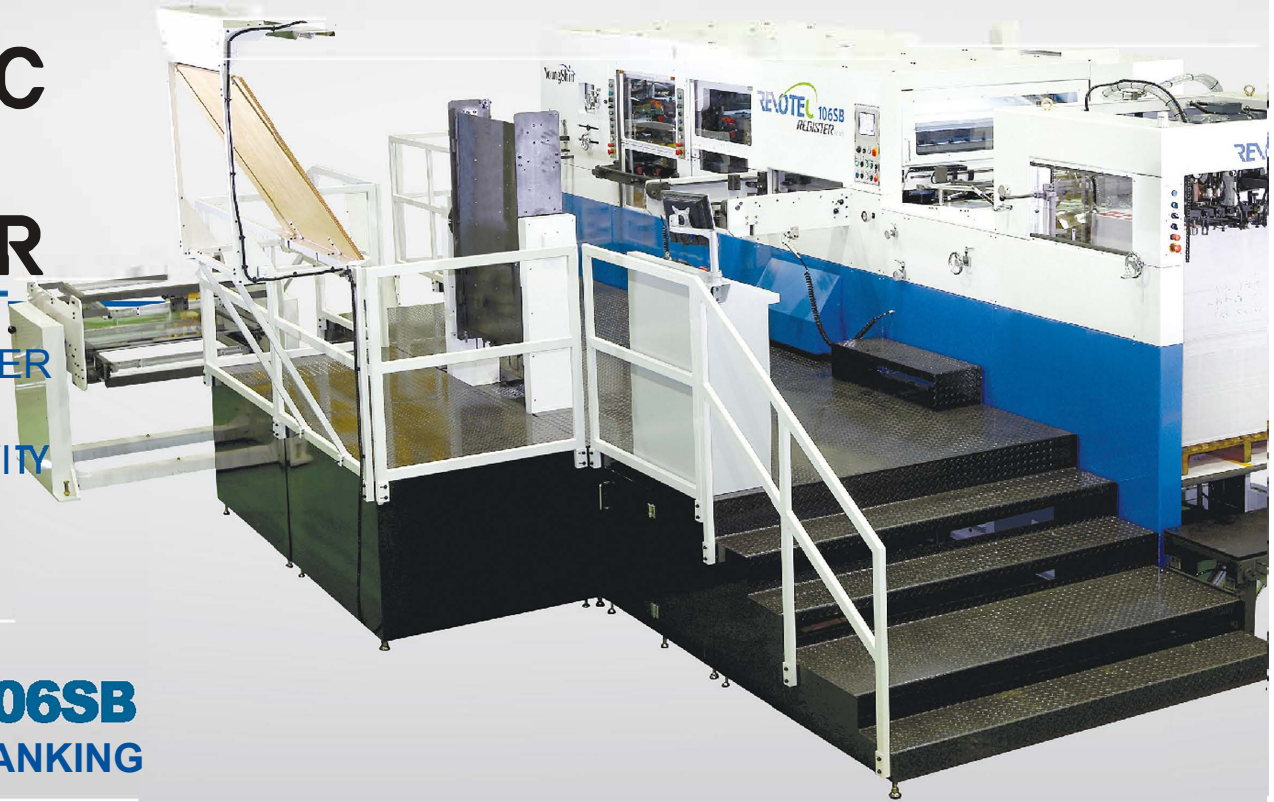

MICRO-ADJUSTMENT
Micro-adjustment enables adjustment of the cutting plate right, left, forward and back to keep the creasing matrix in alignment.




SIDE LAY SYSTEM
Standard equipment of pull or push side lays. Photo sensor to detect sheet mis-register.




DIE CHASE
The die is easily and securely fixed by means of clamps and screws to keep the die flat.



OPERATOR INTERFACE
The operator interface with the machine is accessible through the Touch Screen. Displays the status of the machine at all times for quick diagnosis.



DIE-CUTTING SECTION
Chase turnover and centerline ensure quick order change. Air floating device for cutting plate.



STRIPPING SECTION
A quick lock tool method and centerline system ensures a quick machine set-up. Also included is the fine adjustability to keep the tools aligned to each other.
Micro-Adjustment

AUTOMATIC FLATBED DIECUTTER FOR FOLDING CARTON


AUTOMATIC FLATBED DIECUTTER

THE LEADING SUPPLIER
OF INCREASED DIE
CUTTING PRODUCTIVITY

Specifications of REVOTEC 106SB

Sheet size	Maximum		1,060 × 760 mm	41,73" × 29,92"
	Minimum		400 × 340 mm	15,74" × 13,38"
Cutting size	Without Margin Die	Maximum	1,060 × 745 mm	41,73" × 29,33"
	With Margin Die	Maximum	1,060 × 760 mm	41,73" × 29,92"
Inside Chase			1,140 × 784 mm	44,88" × 29,68"
Minimum Gripper Margin			8 mm	0,31"
Speed	Maximum		8,000 s/h	8,000 s/h
	Minimum		1,800 s/h	1,800 s/h
Maximum cutting pressure			300 tons	331 US tons
Sheet Thickness	Paper Substrates		0,1 ~ 1,5 mm	0,004" ~ 0,060"
	Corrugated Board		EB Flute (Max, 4mm)	EB Flute (Max, 0,157")
Weight			23 tons	25 US tons
Electricity	Main Motor		15 KW	45 AMP/45
	Total Power		38,5 KW	116 AMP
	Voltage Requirement		480V, 60HZ, 3 PHASE	480V, 60HZ, 3 PHASE
	Amps		~240	~240

OPTION : REGISTER PLUS



BLANKING SECTION


Featuring the same quick lock tool system for reduced set-up time. Also included is the fine adjustability to keep the tools aligned to each other.

Micro-Adjustment




MALE BLANKING UNIT

Heavy duty for prolonged life and durability that ensures adequate pressure for blanking out the product.



BINDER SHEET ELEVATOR

Automatically controlled alarm on Touch Screen when binder sheet pile is empty.



BINDER SHEET

The binder sheet ensures the stability of the stacked blanks on the palette.



DELIVERY WASTE CONVEYOR

The gripper releases the waste and the conveyor discharges the waste to the house scrap system. Available with high pile system.



HIGH PILE COMBINATION

This Blanker can be used for normal high pile system in the delivery area.